



## 9100 Series

### Wide-Bandwidth, High-Power Switch-Mode Amplifiers

**AE Techron's 9100 Series** amplifiers are 200Vp, DC-to-250 kHz capable amplifiers that offer a unique combination of switch-mode efficiency and linear-amplifier-like fidelity in a single, compact package. They are able to drive virtually any type of load without a reduction in rated power, with low distortion and low DC drift.

The 9100 series is a powerful and flexible partner when the environment is difficult or existing AC Mains options are limited. It is able to be powered from any normal single-phase AC mains voltage (100V AC – 250V AC). It is power-efficient, producing up to 2,000 watts output from a 20A, 120V AC mains supply, and up to 5 kW\* from 230V or 240V sources.

This combination of features makes the 9100 series an ideal solution for a wide range of high-current, low-voltage applications that require both wide bandwidth and the ability to drive reactive or widely varying load impedances.

NOTE: The handles are not to be used for carrying the amplifier and only lift the device using a two-person technique.

	Continuous Output Current		
	9105	9110	9115
13.5 VDC	35A	60A	90A
24 VDC	35A	60A	90A
48 VDC	34A	60A	90A
30 VAC	35A	70A	100A
60 VAC	35A	70A	80A
120 VAC	35A	37A	37A

Performance data is for a purely resistive load; performance will be improved into loads that are partially or completely reactive.

### Features

- Stable when driving highly capacitive loads.
- Four-quadrant operation.
- Fixed or variable gain.
- User-selectable current limit to protect fragile DUTs or where specified in the Standard.
- DC enabled or DC blocked and DC Servo (for driving transformer-coupled loads or coils).
- Balanced and/or unbalanced input.
- Operate as a voltage-controlled voltage source or voltage-controlled current source.
- Variable output impedance from 0 to 1 ohm (Voltage mode).

### Performance Overview:

Bandwidth:	DC to 250 kHz
Minimum Drop/Rise Time:	7μs
Slew Rate:	Up to 150 V/μs
Maximum Voltage:	200 V <sub>P</sub>
Maximum Current:	100 A <sub>RMS</sub>
Distortion:	<0.1% at 1 kHz, below clip
Maximum Long-Term Power:	5 kW*

\*9105 output is 4.2 kW from 230V or 240V sources; output for all other models is 5 kW.

## Specifications

### 9105

#### Maximum Continuous Output

Current: 35A<sub>RMS</sub> AC or DC

Power: 2 kW from 20A, 120VAC;  
4.2 kW from 30A, 230/240VAC

Supply Voltage: Universal power supply with PFC, single-phase, 100V to 240V AC  $\pm 10\%$ , 30A, 50/60 Hz

Quiescent Power, Standby: 55W  
Run: 135W

Dimensions (HxWxD): 3.47 x 17.3 x 22.8 in. (8.81 x 43.94 x 57.91 cm)

Weight: Approximately 40 lbs. (18.14 kg)

### 9110

#### Maximum Continuous Output

Current: 70A<sub>RMS</sub> AC or DC

Power: 5 kW

Supply Voltage: Universal power supply with PFC, single-phase, 100V to 240V AC  $\pm 10\%$ , 30A, 50/60 Hz

Quiescent Power, Standby: 55W  
Run: 135W

Dimensions (HxWxD): 3.47 x 17.3 x 22.8 in. (8.81 x 43.94 x 57.91 cm)

Weight: Approximately 45 lbs. (20.41 kg)

### 9115

#### Maximum Continuous Output

Current: 100A<sub>RMS</sub> AC or DC

Power: 5 kW

Supply Voltage: Universal power supply with PFC, single-phase, 100V to 240V AC  $\pm 10\%$ , 30A, 50/60 Hz

Quiescent Power, Standby: 55W  
Run: 285W

Dimensions (HxWxD): 3.47 x 17.3 x 22.8 in. (8.81 x 43.94 x 57.91 cm)

Weight: Approximately 50 lbs. (22.68 kg)

## Common Data (all models)

Operating Modes: AC, DC, and AC + DC

Frequency, AC Mode Output (-3 dB): DC – 250 kHz

Max Voltage Ranges (no load),

AC: 0 – 140 V<sub>RMS</sub>

AC + DC: 0 –  $\pm 200$  V<sub>p</sub>

Load Regulation (ref to full scale): <0.05%, DC to 100 Hz; <0.1%, 10 Hz to 10 kHz

Line Regulation (full scale): 100V to 250V AC<sub>RMS</sub>

Harmonic Distortion (80 kHz, low-passed): Less than 0.3% from 10 Hz to 30 kHz; 0.5% up to 50 kHz

Harmonic Distortion (30 kHz, low-passed): Less than 0.1% from 10 Hz to 50 kHz

DC Offset: <2mV

Distortion: <1.0%

THD: .02% at 1kHz

Ripple Voltage: 250mV @ 250kHz

Voltage Slew Rate, 8 $\Omega$ : 150 V/ $\mu$ s

Efficiency: 85%, typical

Power Factor: .98, typical

Source Impedance: 5 m $\Omega$  + 6  $\mu$ H

Cooling: Internal forced-air fans

Protection: Over/under voltage, over current, over temperature

Input, Signal In: BNC connector (unbalanced)

Output: High-current barrier strip

Operating Environment,

Temperature: 5 °C to 50 °C (41 °F to 122 °F);  
Maximum output power de-rated above 30 °C (86 °F)

Humidity: Maximum relative humidity 80% for temperatures up to 31 °C decreasing linearly to 50% relative humidity at 40 °C

Altitude: 3000 m Maximum

Environment: Indoor Use Only, Pollution degree 2

Equipment Class: Group 1 Class A

Transient Overvoltage: Overvoltage Category II

## 9100 Series Default DIP Switch Settings

Red = Default

OFF	ON				
1		1	DC SERVO	OFF	ON
2		2	OPERATION MODE	CC	CV
3		3	COMPENSATION NETWORK 2	OFF	ON
4		4	COMPENSATION NETWORK 1	OFF	ON
5		5	CONTROL CONFIGURATION	FOLLOWER	MASTER
6		6	COUPLING	AC	DC
7		7	GAIN BIT 3 (MSB)	OFF	10
8		8	GAIN BIT 2	OFF	5
9		9	GAIN BIT 1 (LSB)	OFF	2.5
10		10	ELECTRONIC GAIN MATCHING	OFF	ON
11		11	CURRENT LIMIT BIT 1	OFF	BIT 1 VALUE*
12		12	CURRENT LIMIT BIT 2	OFF	BIT 2 VALUE*

NOTE: GRAY TEXT INDICATES SWITCH USED FOR FACTORY CONFIGURATION ONLY.  
ALL BIT SWITCHES ARE ADDITIVE. RIGHT = ON.

\*CURRENT LIMIT VALUES:

BIT 1 = +25Ap (9105), +50Ap (9110), +75Ap (9115)

BIT 2 = +12.5Ap (9105), +25Ap (9110), +37.5Ap (9115)

MIN=12.5Ap (9105), 25Ap (9110), 37.5Ap (9115)

MAX= 50Ap (9105), 100Ap (9110), 150Ap (9115)

## SIM-91 Default DIP Switch Settings

Red = Default

OFF	ON				
1		1	SYNTHETIC IMPEDANCE BIT 3 (MSB)	OFF	BIT 3 VALUE**
2		2	SYNTHETIC IMPEDANCE BIT 2	OFF	BIT 2 VALUE**
3		3	SYNTHETIC IMPEDANCE BIT 1 (LSB)	OFF	BIT 1 VALUE**
4		4	UNUSED	OFF	NULL






NOTE: ALL BIT SWITCHES ARE ADDITIVE. RIGHT = ON.

\*\*SYNTHETIC IMPEDANCE VALUES:

BIT 3 = +0.5 $\Omega$  (9105), +0.25 $\Omega$  (9110), +0.166 $\Omega$  (9115)


BIT 2 = +0.25 $\Omega$  (9105), +0.125 $\Omega$  (9110), +0.0833 $\Omega$  (9115)

BIT 1 = +0.125 $\Omega$  (9105), +0.0625 $\Omega$  (9110), +0.0416 $\Omega$  (9115)

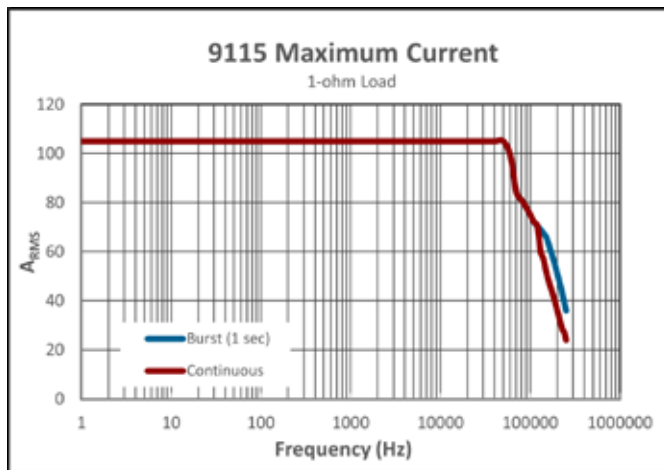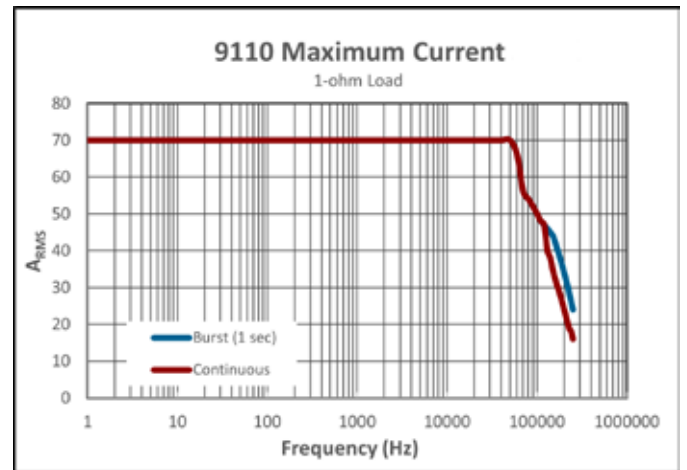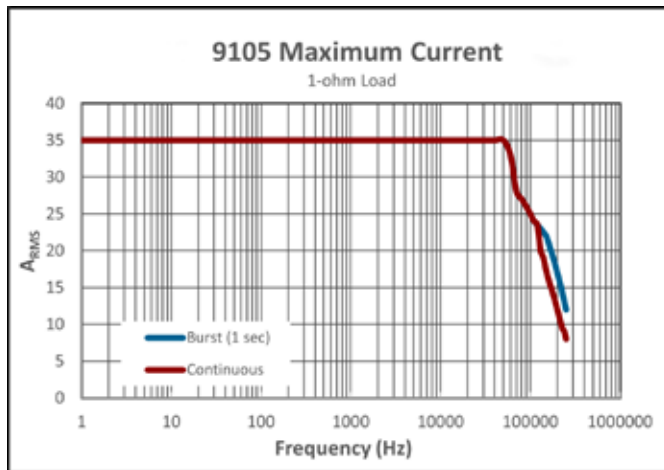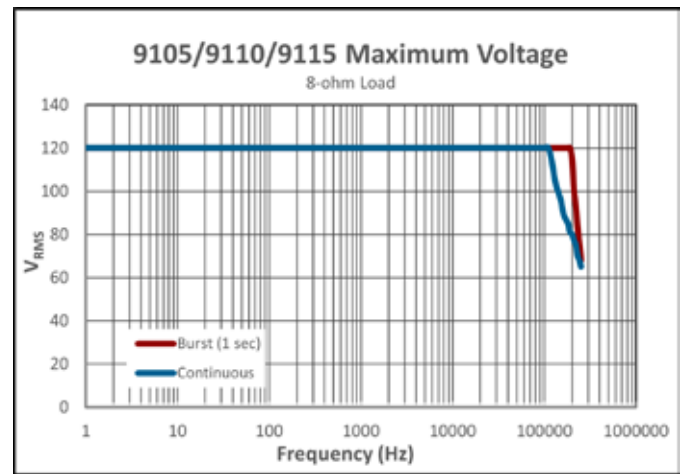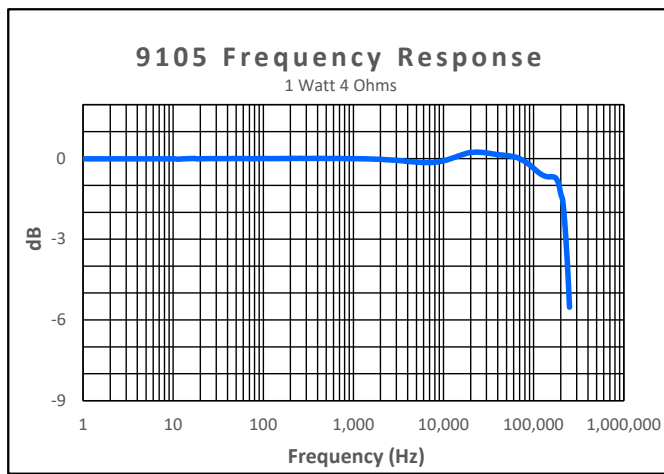

THD + Noise*	
Below	mV
500 kHz	25
80 kHz	2

\*THD + Noise with 1V input, 8-ohm load

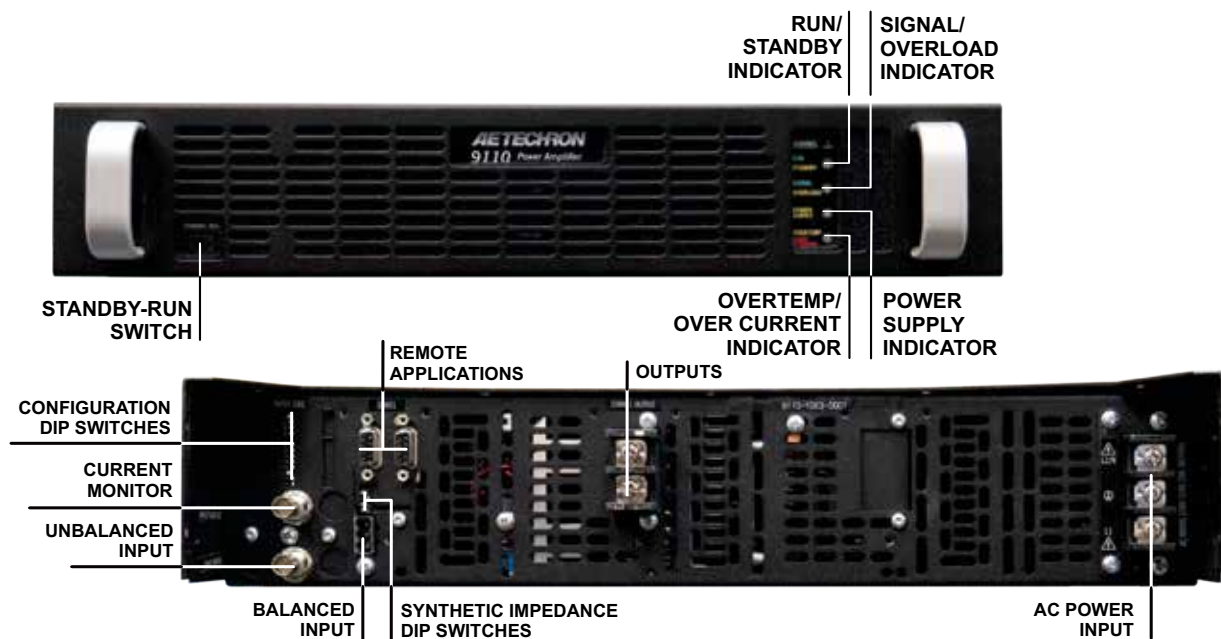

CURRENT MONITOR: 1V = 10ARMS (9105) 1V = 20ARMS (9110) and 1V = 30 ARMS (9115)



*AE Techron Sales Representative*